

### FRDX Repair Patch

CYG FRDX repair patches and hot melt adhesive sticks are hot-applied repair materials for damaged mainline coating or field joint coating. It is a cost effective repair system for any damaged PE coatings during transportation, storage and installation of coated pipes.




#### Properties:

Property	Test method	Value
Axial Variation	200°C, 5min	≤ 5%
Circumferential Variation	200°C, 5min	≤ 5%
Softening Point	ASTM E28	100°C
Lap Shear Strength	ASTM D1002	2.3 MPa
Peel Strength (PE/PE)	ASTM D1000	50 N/cm

#### Product Specification

Specifications	Specifications
FRDX 200× 200-1.4/1.0	FRDX 250× 250-1.4/1.0
FRDX 200× 250-1.4/1.0	FRDX 300× 300-1.4/1.08

**Note:** Both pre-cut patch and rolls are normal supply, however, custom-made is available to meet any customer special demand.

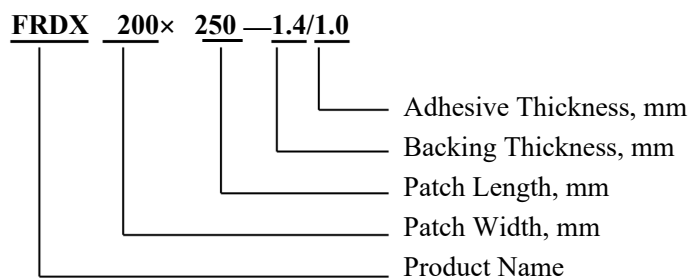

\*) F – radiation cross-linked; R – heat shrinkable; D – tape; X – repair

CYG CHANGTONG NEW MATERIAL CO., LTD

**SOCIEDAD CORRPROTEC SPA**

✉ contacto@corrprotec.cl

☎ + 56 2 2274 0159

🌐 www.corrprotec.cl